

REED Model R1930 Luxmètre

Introduction

This compact light meter is capable of taking Lux and Footcandle (Fc) measurements. The R1930 features a backlit LCD display, data hold and min/max functions, low battery indicator and auto shut-off.

⚠ Warning:


Before using the product, please read the operation manual carefully.

Operation Safety

1. Check the meter before using to ensure the instrument is not damaged.
2. Do not open the meter.
3. When the LCD displays  replace battery as soon as possible.
4. Remove the batteries if the instrument will not be used for an extended period of time.
5. Do not use the meter in high temperature, humidity, flammable, combustible or strong electromagnetic environments.
6. Use a soft cloth and neutral detergent to clean the instrument. Do not use strong agents or solvents.

Display Description

1. Maximum
2. Minimum
3. Data Hold
4. Low Battery Indicator
5. Foot Candle
6. Lux
7. Value 10 or Value 10
8. Illumination Value



Key Functions & Setup

ON/OFF

Press once to turn on unit. Press again to power off. Disable the product's auto power off feature by pressing and holding "HOLD" and then press "ON/OFF" key to enable/disable auto power off, LCD will display "APO OFF" to indicate status.

LUX/FC

Unit conversion button. Press this button to select Lux or Foot Candles.

MAX/MIN

Press this button to cycle through maximum, minimum and live measurement functions. Select maximum and the maximum reading will be shown; select minimum and the minimum reading will be shown.

HOLD/BL


HOLD: Press the button once to hold the measurement and press it again to continue measuring. BL: Hold button to turn the backlight display on and off.

Specifications

Measuring Range(s)	Lux: 0 to 199999 Fc: 0 to 18580
Accuracy	0-9999 Lux (0-929 Fc): ±(4% rdg.+ 8 dgt) ≥10000 Lux (≥929 Fc): ±(5% rdg.+ 10 dgt)
Resolution	Lux: 1, 10
Sensor Type	Silicon photocell
Display	4-digit LCD
Backlit Display	Yes
Data Hold	Yes
Min	Yes
Max	Yes
Overrange Indicator	Yes
Sampling Rate	2 times/sec.
Auto Shut-off	Yes (after 5 mins, off)
Low Battery Indicator	Yes
Power Supply	3 "AAA" batteries
Product Certifications	CE
Storage Temperature	4 to 140°F (-10 to 60°C)
Operating Humidity Range	10-80%
Dimensions	6.3 x 1.9 x 1.1"
Poids	4.2 oz (118g)

Battery Installation and Replacement

1. This meter uses 3 AAA batteries. Refer to the figure below for battery installation and replacement steps.
2. Push the battery cover open in the direction of the arrow, lift the cover and remove the batteries.
3. Install new batteries in accordance of polarity indications.
4. Close the cover tightly after installing new batteries.

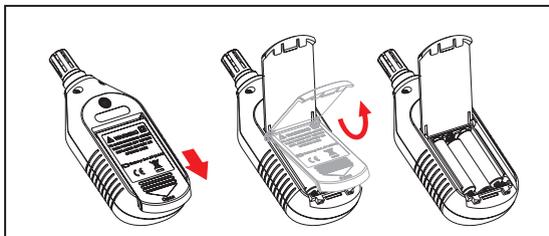

For service (repairs or calibration) on this or any other REED product or information on other REED products, contact REED Instruments at info@reedinstruments.com.

REED Instruments

1-877-849-2127 | info@reedinstruments.com | www.reedinstruments.com